
HiLight H6+ Your site, your light!

The **HiLight H6+** light tower offers **low operational costs**, **reduced noise levels** and **increased illumination coverage**. It is ideal to use in tough environments, such as applications in construction, mining, and rental companies. The next generation of LED floodlights are more efficient and provide optimal light distribution covering an area up to 6,000m2.



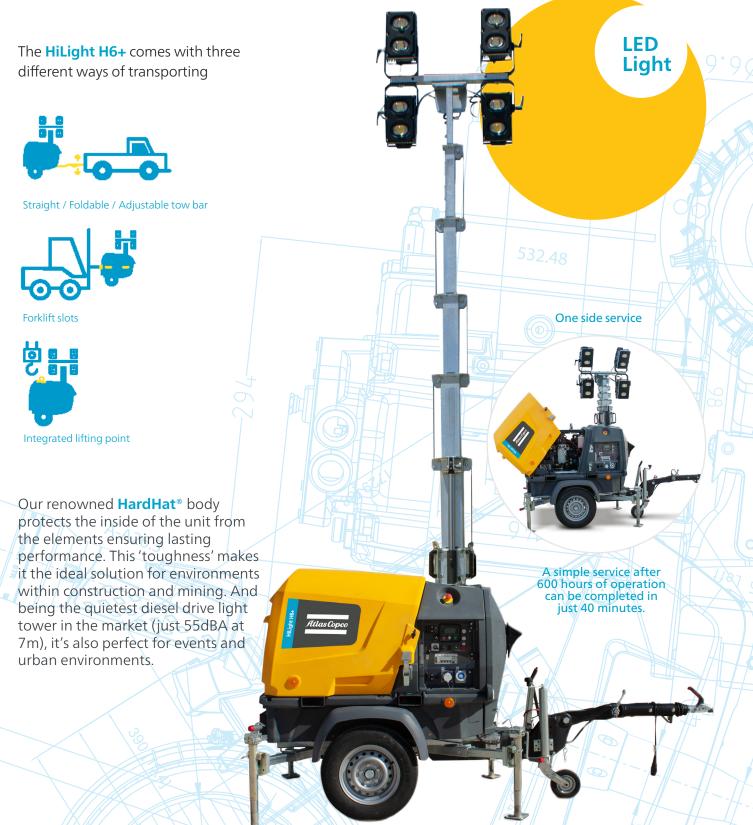

Performance Data		HiLight H6+	
Rated Frequency	Hz	50	
Rated Voltage	VAC	230	
Rated Power (PRP)	kW	2.7	
Operating Temperature (min/max)	۰C	-20 40	
Sound Power Level (LwA)	dB(A)	82	
Sound Pressure Level (LpA) at 7m	dB(A)	55	

		DIESEL	
	Light coverage m ² (average 20 luxes)	6000 (average 20 luxes)	
	Lamps	 LED	
	Mast	Vertical hydraulic	
89 20	Extra features	HardHat® Canopy	

Richard North

Phone: 07342 034 801 Email: richard.north@listerwilder.co.uk *Atlas Copco*

www.listerwilder.co.uk

